

# Arndt & Herman

BUILDING PRODUCTS®



## Exterior Shutters, Gable Vents & Mounting Blocks

SOLUTIONS

- Raised panel and open louvered
- 15 sizes in stock
- Transom, Quarter Round and Eyebrow
- Color molded throughout
- Extra heavy duty
- Won't chip, rot or warp

August 2009

# Table of Contents

Features	Page 2
Mounting Blocks	Page 3
Shutters	Page 4-5
Gable Vents	Page 6-7

## Shutters:

- Colonial Raised Panel and Traditional Open Louver in stock
- Elliptical Top, Transom Top and Quarter Round in stock
- Comes with Shutter-Tite fasteners and painted head metal screws
- UV-stabilized colors completely through the polypropylene shutter
- Classic, deep-cut look and woodgrain texture
- 30% thicker and heavier than most others
- 13 popular sizes in stock
- 14 colors and paintable in stock
- Packaged 1 pair per carton
- True 15" width
- Won't chip, rot or warp
- Extra heavy duty
- Limited lifetime warranty






## Gable Vents:

- 18 sizes and 7 shapes in stock
- 6 colors in stock
- Exclusive non-removable hinged ring
- Self-leveling centered nailing hole
- Extra wide pre-slotted nailing flange
- 1/8" fiberglass screening
- Packaged 1 per carton
- Limited lifetime warranty

## Mounting Blocks:

- 6 most popular mounting blocks
- 6 colors in stock
- Exclusive non-removable hinged ring
- Packaged 6 per carton except dryer vent
- Limited lifetime warranty

SOLUTIONS



# Mounting Blocks

## Mounting Block Color Codes

White ..... 001

Gray ..... 019

Clay ..... 027







Tan ..... 031

Wicker ..... 033

Beige ..... 038

Packaging: 6 per carton except dryer vent

Features: Exclusive one-piece hinged ring

	Outside Dimensions	Depth	Packaged	Item Number *** = Color Number
<b>5.5" x 6.5" Standard</b>				
	7.5" x 8.5"	1-1/2"	6 per carton	MB-STD-0809-***
<b>4.75" x 3.3125" Mini Electrical Mount</b>				
	6.75" x 5.3125"	1-1/2"	6 per carton	MB-ME-0406-***
<b>5.125" x 6.875" Recessed Mini</b>				
	5.125" x 6.875"	1-3/4"	6 per carton	MB-MR-0507-***
<b>6.5" x 11" Big Block</b>				
	8.625" x 13.125"	1-1/2"	6 per carton	MB-BB-0913-***
<b>5.5" x 6.5" Electrical Block</b>				
	7.5" x 8.5"	2"	6 per carton	MB-EB-0607-***
<b>5.5" x 5.5" Vent Kit (Intake exhaust vent and dryer vent in one)</b>				
	7.5" x 7.5"	2"	1 per carton	MB-VK-0808-***

# Shutters

## Shutter Color Codes

White . . . . . 001	Brick . . . . . 009
Black . . . . . 002	Hunter Green . . . . . 010
Navy Blue . . . . . 003	Heritage Green . . . . . 011
Ocean Blue . . . . . 004	Coffee Brown . . . . . 012
Wedgewood Blue . . . . . 005	Paintable . . . . . 013
Storm Gray . . . . . 006	Tan . . . . . 057
Merlot . . . . . 007	Musket Brown . . . . . 083
Cranberry . . . . . 008	

Color sample rings are available

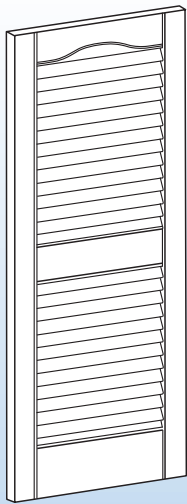
Packaging: 1 pair per carton with 3" Shutter-Tite fasteners (12 per bag) and painted head metal screws.

Width: 15" Quick Ship, 12" Made to Order

Arndt & Herman's Traditional Louvered and Colonial Raised-Panel Shutters offer both the builder and homeowner the rich look of beautiful handmade wood shutters we all grew up seeing. Today, they are made of a durable copolymer polypropylene, making them virtually maintenance-free.

Our shutters are a true 15" wide and are UV-stabilized with colors that go completely through the shutter. They won't chip, rot or warp, and are strong enough to withstand the harshest of weather conditions – from the blizzard colds up north to the hottest and sunniest parts of the south. And, this is backed by the Arndt & Herman name.

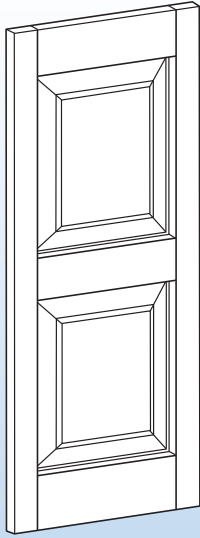
## Traditional Open Louver Shutters



Shutter Width	Shutter Length	Window Range in Height	Wood Size Window Heights	Vinyl Size Window Heights	Item Number *** = Color Number
15"	31"	28" - 33"			LV-1531-***
15"	36"	34" - 38"	2/10	3/0	LV-1536-***
15"	39"	37" - 41"	3/2		LV-1539-***
15"	43"	41" - 45"	3/6		LV-1543-***
15"	48"	46" - 50"	3/10	4/0	LV-1548-***
15"	52"	50" - 54"	4/2		LV-1552-***
15"	55"	53" - 57"	4/6		LV-1555-***
15"	60"	58" - 62"	4/10	5/0	LV-1560-***
15"	64"	62" - 66"	5/2		LV-1564-***
15"	67"	65" - 69"	5/6		LV-1567-***
15"	72"	70" - 74"	5/10	6/0	LV-1572-***
15"	75"	73" - 77"	6/2		LV-1575-***
15"	80"	78" - 82"	6-8 Door	6-8 Door	LV-1580-***




# Shutters

## Colonial Raised Panel Shutters



Shutter Width	Shutter Length	Window Range in Height	Wood Size Window Heights	Vinyl Size Window Heights	Item Number *** = Color Number
15"	31"	28" - 33"			RP-1531-***
15"	36"	34" - 38"	2/10	3/0	RP-1536-***
15"	39"	37" - 41"	3/2		RP-1539-***
15"	43"	41" - 45"	3/6		RP-1543-***
15"	48"	46" - 50"	3/10	4/0	RP-1548-***
15"	52"	50" - 54"	4/2		RP-1552-***
15"	55"	53" - 57"	4/6		RP-1555-***
15"	60"	58" - 62"	4/10	5/0	RP-1560-***
15"	64"	62" - 66"	5/2		RP-1564-***
15"	67"	65" - 69"	5/6		RP-1567-***
15"	72"	70" - 74"	5/10	6/0	RP-1572-***
15"	75"	73" - 77"	6/2		RP-1575-***
15"	80"	78" - 82"	6-8 Door	6-8 Door	RP-1580-***

## Shutter Add-Ons (Use with Raised Panel)

	Width	Item Number *** = Color Number
<b>Quarter Round Top</b>		
	15"	RP-15QR-***
<b>Elliptical Top</b>		
	15"	RP-15EB-***
<b>Transom Top</b>		
	15"	RP-15TT-***

# Gable Vents







## Gable Vents Color Codes

White ..... 001  
 Gray ..... 019  
 Clay ..... 027

Tan ..... 031  
 Wicker ..... 033  
 Beige ..... 038

Packaging: 1 per carton


Features: Exclusive one-piece hinged ring, sealed-in fiberglass screening.

	Outside Dimensions	Depth	Venting Area (sq. in.)	Item Number *** = Color Number
<b>18" Economy Octagon</b>				
	19.25"	2"	46.8	GV-OCT-0018-***
<b>22" Octagon</b>				
	22.5"	2"	79.0	GV-OCT-0022-***
<b>22" Round</b>				
	22.5"	2"	75.0	GV-RD-0022-***
<b>32" Round</b>				
	32.5"	2"	216.3	GV-RD-0032-***
<b>12" x 12" Square</b>				
	14.5" x 14.5"	1-3/4"	35.0	GV-SQ-1212-***
<b>12" x 18" Rectangle</b>				
	14.5" x 20.5"	2"	63.0	GV-RE-1218-***

# Gable Vents

	Outside Dimensions	Depth	Venting Area (sq. in.)	Item Number *** = Color Number
<b>18" x 24" Rectangle</b>				
	20.62" x 26.75"	2"	127.8	GV-RE-1824-***
<b>24" x 30" Rectangle</b>				
	25" x 35"	2"	288.3	GV-RE-2430-***
<b>14" x 22" Round Top</b>				
	16.62" x 24.50"	2"	85.0	GV-RT-1422-***
<b>22" x 32" Large Round Top</b>				
	25" x 35"	2"	274.0	GV-RT-2232-***
<b>22" x 34" Half Round</b>				
	22" x 34"	2"	157.5	GV-HR-2234-***

## Various Pitch Triangles



Outside Dimensions	Pitch	Venting Area (sq. in.)	Item Number *** = Color Number
85.500" x 15.568"	4/12	142.0	GV-TR-0412-***
55.753" x 17.615"	5/12	157.0	GV-TR-0512-***
62.673" x 17.615"	6/12	129.0	GV-TR-0612-***
53.945" x 17.736"	7/12	108.0	GV-TR-0712-***
47.424" x 17.808"	8/12	93.0	GV-TR-0812-***
38.323" x 17.970"	10/12	71.0	GV-TR-1012-***
32.306" x 18.153"	12/12	57.0	GV-TR-1212-***

Triangle Vents available only in white. Made of cellular PVC.

# Installation Instructions

## Using Shutter-Tites

1. Place shutter next to window and mark desired location against wall or window.
2. For smaller size shutters use four Shutter-Tites per shutter. For larger sizes, 55" and over, use six Shutter-Tites per shutter.
3. Pre-drill holes in shutter uniformly before attaching to wall. On brick, position over mortar lines. On horizontal siding, position over highest points. Use 5/16" drill bit.
4. Reposition shutter against wall, drill through holes in shutter and into wall surface 3-1/4" deep. Make sure you drill holes deep enough so that the Shutter-Tite doesn't bottom out. On non-masonry walls, be sure there are no wires or pipes in the walls behind where you are drilling holes.
5. Push Shutter-Tite through hole in shutter and into wall surface. Gently tap Shutter-Tite with a rubber mallet to snug shutter against siding. **DO NOT POUND IN TOO FAR**, because it will cause the shutter to dimple.

## Using painted head metal screws

1. Place shutter next to window and mark desired location against wall or window.
2. For smaller size shutters use four screws per shutter. For larger sizes, 55" and over, use six screws per shutter.
3. Pre-drill holes in shutter uniformly before attaching to wall. On brick, position over mortar lines. On horizontal siding, position over highest points. Use 3/16" drill bit.
4. Reposition shutter against wall and using the holes in the shutter, mark location of pilot holes in the wall.
5. Remove shutter and drill 1/4" holes into wall surface 2" deep. On non-masonry walls, be sure there are no wires or pipes in the walls behind where you are drilling holes.
6. Hold shutter in position and install with the screws provided. Do not over tighten.

**Arndt & Herman**  
BUILDING PRODUCTS®

Manufactured with  Technology



For more information, contact  
1-866-204-3139 or visit [www.arndtandherman.com](http://www.arndtandherman.com)  
Prices and specifications subject to change

**Arndt & Herman**  
BUILDING PRODUCTS®